

Form PTO-1390 U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE (REV 10-95) TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		ATTORNEY'S DOCKET NUMBER 2046-011632
		U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 09/937792
INTERNATIONAL APPLICATION NO. PCT/US00/09269 ✓	INTERNATIONAL FILING DATE 07.04.00 (07 April 2000) ✓	PRIORITY DATES CLAIMED 08.04.99 (08 April 1999) ✓
TITLE OF INVENTION TOP OF RAIL APPLICATOR ✓		
APPLICANT(S) FOR DO/EO/US W. Thomas URMSON, Jr., John W. MOSPAN and Frank T. LENCO ✓		
<p>Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:</p> <ol style="list-style-type: none"> <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371 <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). <input checked="" type="checkbox"/> has been transmitted by the International Bureau. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)) <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). <input type="checkbox"/> have been transmitted by the International Bureau. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired <input checked="" type="checkbox"/> have not been made and will not be made. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). <p>Items 11. to 16. below concern document(s) or information included:</p> <ol style="list-style-type: none"> <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. <input type="checkbox"/> A substitute specification. <input type="checkbox"/> A change of power of attorney and/or address letter. <input checked="" type="checkbox"/> Other items or information: <ol style="list-style-type: none"> WO 00/61418-Front Page with Abstract, specification, claims and drawings (23 pp.) 		

U.S. APPLICATION NO. (if known, see 37 CFR 1.5) <div style="font-size: 2em; font-weight: bold; margin-top: 5px;">09/937792</div>	INTERNATIONAL APPLICATION NO. PCT/US00/09269	ATTORNEY'S DOCKET NUMBER 2046-011632
---	---	---

17. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO..... \$860.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) \$690.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))..... \$710.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO..... \$1000.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)..... \$100.00	CALCULATIONS PTO USE ONLY																																																																					
ENTER APPROPRIATE BASIC FEE AMOUNT =	\$ 100.00																																																																					
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).	\$ 130.00																																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">CLAIMS</th> <th style="width: 20%;">NUMBER FILED</th> <th style="width: 20%;">NUMBER EXTRA</th> <th style="width: 20%;">RATE</th> <th style="width: 20%;"></th> </tr> </thead> <tbody> <tr> <td>Total claims</td> <td>28 - 20</td> <td>8</td> <td>X \$18.00</td> <td>\$ 144.00</td> </tr> <tr> <td>Independent claims</td> <td>4 - 3 =</td> <td>1</td> <td>X \$80.00</td> <td>\$ 80.00</td> </tr> <tr> <td colspan="3">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ \$270.00</td> <td>\$ 0.00</td> </tr> <tr> <td colspan="4">TOTAL OF ABOVE CALCULATIONS =</td> <td>\$ 454.00</td> </tr> <tr> <td colspan="4">Reduction of 1/2 for filing by small entity, if applicable.</td> <td>\$ 227.00</td> </tr> <tr> <td colspan="4">SUBTOTAL =</td> <td>\$ 227.00</td> </tr> <tr> <td colspan="4">Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)). +</td> <td>\$ 0.00</td> </tr> <tr> <td colspan="4">TOTAL NATIONAL FEE =</td> <td>\$ 227.00</td> </tr> <tr> <td colspan="4">Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +</td> <td>\$ 0.00</td> </tr> <tr> <td colspan="4">TOTAL FEES ENCLOSED =</td> <td>\$ 227.00</td> </tr> <tr> <td colspan="4" rowspan="2"></td> <td style="text-align: right;">Amount to be:</td> <td></td> </tr> <tr> <td style="text-align: right;">Refunded</td> <td>\$</td> </tr> <tr> <td colspan="4" rowspan="2"></td> <td style="text-align: right;">Charged</td> <td>\$</td> </tr> </tbody> </table>	CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		Total claims	28 - 20	8	X \$18.00	\$ 144.00	Independent claims	4 - 3 =	1	X \$80.00	\$ 80.00	MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00	\$ 0.00	TOTAL OF ABOVE CALCULATIONS =				\$ 454.00	Reduction of 1/2 for filing by small entity, if applicable.				\$ 227.00	SUBTOTAL =				\$ 227.00	Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)). +				\$ 0.00	TOTAL NATIONAL FEE =				\$ 227.00	Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$ 0.00	TOTAL FEES ENCLOSED =				\$ 227.00					Amount to be:		Refunded	\$					Charged	\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE																																																																			
Total claims	28 - 20	8	X \$18.00	\$ 144.00																																																																		
Independent claims	4 - 3 =	1	X \$80.00	\$ 80.00																																																																		
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00	\$ 0.00																																																																		
TOTAL OF ABOVE CALCULATIONS =				\$ 454.00																																																																		
Reduction of 1/2 for filing by small entity, if applicable.				\$ 227.00																																																																		
SUBTOTAL =				\$ 227.00																																																																		
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)). +				\$ 0.00																																																																		
TOTAL NATIONAL FEE =				\$ 227.00																																																																		
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$ 0.00																																																																		
TOTAL FEES ENCLOSED =				\$ 227.00																																																																		
				Amount to be:																																																																		
				Refunded	\$																																																																	
				Charged	\$																																																																	

a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>227.00</u> to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Assistant Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>23-0650</u> . A duplicate copy of this sheet is enclosed.	<div style="text-align: center;"> SIGNATURE Paul M. Reznick NAME 33,059 REGISTRATION NUMBER </div>
---	--

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:
 Paul M. Reznick
 700 Koppers Building
 436 Seventh Avenue
 Pittsburgh, Pennsylvania 15219-1818
 Telephone: (412) 471-8815
 Facsimile: (412) 471-4094

TOP OF RAIL APPLICATORBACKGROUND OF THE INVENTION1. Field of the Invention

5 The present invention relates to an apparatus for lubricating railroad rails or for applying friction modifiers to railroad rails.

2. Description of the Invention Background

10 In the operation of railroads, it has long been the practice to apply grease or friction modifier materials onto railroad rails, such as to the top of rails or sides of the rails at curves, turnouts, switches, in some cases the sections of the track immediately before a switch, and periodically spaced along the length of the track. Such lubricants and friction modifying materials, such as
15 grease, can either reduce or increase the friction where necessary to improve train performance and reduce wear on both the rails and the train wheels.

In the case of a friction modifying material, i.e., a material that increases the friction between the
20 train wheel and the rail, the practice has been to apply the friction modifier material to the top of the rail to contact the train wheels. However, such prior art devices have been less than adequate. Either the friction modifying material does not reach the center of the rail
25 or substantial amounts of friction modifying material are wasted by dripping or pouring along the sides of the rail.

Therefore, it is an object of the present invention to overcome this limitation.

SUMMARY OF THE INVENTION

30 The present invention is a wayside application system for applying a friction modifying material to the top of railroad rails. More specifically, the present invention is a top of rail applicator bar for applying the material or lubricant to the head of a rail and includes a
35 body; a flow passageway defined in the body for the material to flow through, the flow passageway defining an exit end; and a dam defined adjacent to the exit end and adapted to contain the material with the head of the rail.

The applicator bar dam is preferably made of an elastomeric material, such as Neoprene. Preferably, the dam includes a D-shaped seal. The applicator bar can also include a flexible skirt for enclosing an upper portion of the dam.

- 5 The skirt and a portion of the rail define a material exit to direct the material toward a crown portion of the rail.

The applicator bar forms a part of a top of a rail applicator system that includes a reservoir for supplying the material such as a friction modifying material or lubricant which is in fluid communication with the flow passageway and a pump. The pump is actuated by a pump actuator which is adapted to come in contact with the wheels of a rail vehicle. In lieu of a pump actuator, any type of pumping/activating arrangement can be provided such as a wheel detector coupled through a controller, to an electric motor, whereby once the wheel detector detects train wheels, the electric motor is activated and coupled to the pump to supply the friction modifying material or lubricant to the flow passageway. In operation the applicator bar applies the friction modifying material or lubricant by coaction of the rail wheel with the dammed material.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a partial schematic view of a railway rail friction modifying apparatus made in accordance with the present invention;

Fig. 2 is an end elevational view partially in section of an applicator bar coacting with a rail made in accordance with the present invention;

Fig. 3 is an elevational plan view of the applicator bar shown in Fig. 2;

Fig. 4 is an elevational end view of a portion of the applicator bar shown in Fig. 2;

Fig. 5 is a partial sectional elevational view of the applicator bar shown in Fig. 4;

Fig. 6 is an exploded elevational view of the portion of the applicator bar shown in Fig. 2;

Fig. 7 is an end elevational view of another embodiment of the applicator bar made in accordance with the present invention;

5 Fig. 8 is an elevational end view of another embodiment of the applicator bar made in accordance with the present invention;

Fig. 9 is an elevational view of the embodiment shown in Fig. 8 attached to a rail;

10 Fig. 10 is an end view of another embodiment of an applicator bar made in accordance with the present invention;

Fig. 11 is a front elevational view of a portion of the applicator bar shown in Fig. 2;

15 Fig. 12 is a front elevational view of a portion of the applicator bar shown in Fig. 10;

Fig. 13 is an end elevational view of another embodiment of an applicator bar made in accordance with the present invention; and

20 Fig. 14 is an elevational view of a D-shaped seal shown in Fig. 13.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 shows a partial schematic of a top of rail applicator 10 made in accordance with the present invention. Specifically, Fig. 1 shows the railway top of rail applicator 10 for use with railroad rails 12. Each rail 12 includes a base 14 that has flanges 16 and 18 extending therefrom. The rail 12 also includes a head 20 and a web 22 which secures the head to the base 14. A pump actuator 24 is provided, which is substantially the same as the pump actuator disclosed in U.S. Patent 5,394,958, which is hereby incorporated herein by reference. Alternatively, a wheel detector through a controller is coupled with an electric motor arrangement 25, shown in phantom, can be used in lieu of the pump actuator 24. The pump actuator 24 is secured to the rail 12 via clamps, such as S-shaped clamps. The pump actuator 24 or the arrangement 25 coacts with an applicator bar 26 which is schematically shown in

Fig. 1. The pump actuator 24 includes a pump 28 that is in fluid communication with a reservoir 30. In operation a rail wheel, such as a locomotive wheel, contacts the pump actuator 24, thereby, activating the pump 28 and supplying the friction modifying material or a lubricant to the applicator bar 26. The applicator bar 26 is arranged to provide friction modifying material adjacent the field surface or outside surface of the rail head 20 as opposed to the gauge surface or inside surface of the rail head 20. Alternatively, the arrangement 25 is activated by the presence of a rail wheel passing thereby. Typically, the pump actuator 24 and/or the arrangement 25 are placed in close proximity to the applicator bar 26, while the reservoir is positioned twenty-five to thirty feet from the applicator bar 26.

Typically, the electric motor of the arrangement 25 is operated by 220 volt AC, 110 volt AC or 12 volt DC, for example. The electric motor can be so arranged so that the friction modifying material or lubricant is supplied to every wheel, or every other wheel, etc. Generally, four applicator bars 26 are supplied by one reservoir 30. It has been found that if the friction modifying material has a viscosity similar to water, then check valves 31 are provided in fluid communication with each applicator bar 26 to prevent the reverse flow of the friction modifying material. Also, flow control valves, such as globe valves 31', can be provided to control flow through each of the applicator bars 26.

A first embodiment of the applicator bar 26, made in accordance with the present invention, is shown in Figs. 2-6. Referring specifically to Figs. 2 and 3, the applicator bar 26 is mounted to the rail 12 through two oppositely positioned mounting clamps 32. Each mounting clamp 32 includes a J-bolt 34 having a J-shaped end adapted to receive the flange 16. Each J-bolt 34 includes a threaded end 36 that passes through the mounting clamp 32. The mounting clamp 32 also includes a recess adapted to

receive the flange 18. Nuts and a lockwasher 38 are received at the threaded end 36 to securably hold the mounting clamp 32 to the rail 12. Spacers 40 are provided on an upper surface of the mounting clamp 32 onto which an applicator bar mounting body 44 is secured through a fastener 42. The fastener 42 has a threaded end that is threadably secured to the mounting clamp 32. The applicator bar 26 is secured to the applicator bar mounting body 44.

Referring to Figs. 4-6, the applicator bar 26 includes a body 45 that includes an inlet 46 which is in fluid communication with the pump 28 through hosing (not shown) connecting the inlet 46 to the pump 28. The inlet 46 is secured and is in fluid communication with a manifold 48. The manifold 48 includes a plurality of channels C, similar to the channels disclosed in U.S. Patent No. 5,394,958. A manifold bar 50 is secured to the manifold 48 by fasteners 52. A fluid passageway P is defined by channels C formed in the manifold 48 and holes H provided in the manifold bar 50, similar to that as disclosed in U.S. Patent No. 5,394,958. Preferably, all of the surfaces defining the fluid passageways are lined with Teflon®. An inner seal 54 is provided and secured to a front blade 56. The front blade 56 abuts against an outer surface of the manifold bar 50. The front blade 56 includes a plurality, in this case two, of slots SL aligned with holes H. The front blade 56 includes a plurality of aligning tabs 58. A distribution blade 60 receives the aligning tabs 58 and abuts against the front blade 56. The distribution blade 60 includes slots L that receive tabs 58 and abut against the front blade 56. A vertical flow passageway F is defined by inner surfaces of the front blade 56 and the distribution blade 60.

An elongated "D-shaped seal" 62 is secured to an outer surface of the distribution blade 60. A back bar 64 is secured to the distribution blade 60. Fasteners 66 pass through the back bar 64, the distribution blade 60, the

front blade 56, the manifold bar 50 and the manifold 48 securing the members to one another. The back bar includes an angle bracket 68 to hold a back surface of a seal 62 in place. The manifold channels C, the holes H and slots SL and the space defined front blade 56 and the distribution blade 60 define the flow passageway F, all of which are in fluid communication with each other and permit a friction modifying material to flow therethrough.

Referring back to Fig. 2, the applicator bar 26 is secured to the rail 12 through the J-bolts 34. The spacers 48, which can be varying numbers, are provided so that the inner seal 54 abuts and seals against the head 20 of the rail 12. The inner seal 54 extends along substantially for the entire length of the applicator bar 26. The exit E of the flow passageway F is defined by upper ends of the distribution blades 60 and the front blade 56. In this arrangement, the D-shaped seal has an upper surface positioned above the crown CR of the rail head. Further, as shown in Fig. 3, ends 67 of the D-shaped seal are pressed against the rail head 20 by end brackets B. The crown CR of the rail head is contained on an upper surface SU of the rail. Each end bracket B includes an elongated plate PL attached to one of the applicator bar mounting bodies 44, a piece of key stock K, which is attached to plate PL, is arranged to sandwich the D-shaped seal 62 against the rail head 20 as shown in Fig. 7. This arrangement will create a reservoir R or dam 69, through a dammed structure defined by the ends 67 and the D-shaped seal 62, the inner seal 54 and an upper end surface of the rail head 20. The dam is positioned adjacent exit end E. The inner seal 54 prevents the friction modifying material from flowing between the rail head 20 and the applicator bar 26, although with a thick friction modifying material, such as grease, the dam 69 may not require the inner seal 54. However, with less viscous materials, such as water based materials, the inner seal should be used. Preferably, D-shaped seal 62 and the inner seal 54 are made

of an elastomeric, flexible material, such as Neoprene/EPDM/SBR closed cell sponge rubber. Seals 54 and 62 are provided with adhesive backings so that they can be adhesively secured to the respective parts of the applicator bar 26. The D-shaped seal 62 has an inner air pocket A between the Neoprene curved member and straight member. It has been found that this arrangement can survive the compression caused by rail wheels contacting the D-shaped seal 54 and compressing the D-shaped seal 62 over a long period of time. Although it is preferable to use the above described seals, any other type of elastic seal will suffice. Also, to prevent the D-shaped seal from being pulled away from the applicator bar 26, an angle bracket 68 (as shown in Fig. 7 and in Figs. 2 and 4-6) can be provided and which is discussed below.

In operation a railroad vehicle travels along the rail 12. Initially a rail wheel of the railroad vehicle passes over the pump actuator 24 thereby activating the pump 28. The pump 28 provides friction modifying material from the reservoir 30 to the applicator bar 26. Alternatively, the previously described arrangement 25 can be provided in lieu of the pump actuator 24. Specifically, the friction modifying material passes through the inlet 46 into the manifold 48 and is distributed along the length of the applicator bar 26. The friction modifying material then passes between the front blade 56 and distribution blade 60 through the flow passageway F and exits through the exit E directed to the rail head 20. The rail head 20, D-shaped seal 62, and inner seal 54 define the reservoir R of friction modifying material that terminate at the crown CR of the rail head 20. As the rail wheels then pass over the portion of the rail head 20 that is adjacent to the applicator bar 26, the friction modifying material, which is directed to the upper surface SU through exit E, then contacts the rail wheel, typically near the crown CR of the rail head 20. When using the arrangement 25, the friction

modifying material can be supplied to a varying number of wheels or all of the wheels.

Fig. 7 shows an alternative embodiment of an applicator bar 26' of the present invention with like numerals used for like elements. Essentially, applicator bar 26' is the same as the applicator bar 26 except for the following differences. Specifically, a Neoprene skirt 70 is secured to an upper portion of the applicator bar 26' through the angle bracket 68. The angle bracket 68 is secured to the back bar 64 via welding. An end of the angle bracket 68 is positioned adjacent the D-shaped seal 62 so that the skirt 70 is sandwiched between the D-shaped seal and the bracket 68. The angle bracket 68 is also used without the skirt 70 to hold the D-shaped seal 62 in place. The skirt 70 extends toward the crown CR of the rail head 20. It is important to note that the skirt 70 should be flexible. The skirt 70 extends substantially along the length of the applicator bar 26'. In this arrangement, a reservoir area 72 is defined, that is bounded by a portion of the rail head 20, an inner surface of the skirt 70, the D-shaped seal 62 and the inner seal 54. Operation of the applicator bar 26' is similar to that as previously described for applicator bar 26, except, that as the rail wheels pass over the skirt 70 lubricant is squeezed onto the rail head through a passageway 74 defined by the end of the skirt 70 and the rail head 20. The skirt 70 is arranged to provide the friction modifying material toward an upper surface. It has been found that this arrangement improves the application of the friction modifying material to the rail 12 and rail wheels. Further, it has been found that the skirt 70 prevents excess friction modifying material flowing from around the seals and it has been found that the skirt 70, which is positioned adjacent the exit end E, prevents evaporation of the friction modifying material over time and prevents clogging of the exit passageway defined between the front blade and distribution blade 60 through the evaporation of the friction modifying

material. Furthermore, it has been found that the skirt 70 prevents excess dirt and other materials from clogging the exit passageway E. The skirt 70 can be replaced periodically due to wear. It has also been found that the skirt end 76 should be positioned below the crown CR of the rail head 20 for the best results. It has also been found that the tread or outer edge of the rail wheel should contact an intermediate portion 78 of the skirt 70 for the best application of the friction modifying material. Preferably, the skirt is made of a flexible elastomeric material, although it may be made of other materials such as metal.

Figs. 8 and 9 show another alternative embodiment 26'' of an applicator bar similar to that shown in Figs. 1-6, except for the below noted difference. Like reference numerals will be used for like elements.

First, the single elongated D-shaped seal 62 is eliminated and two substitute D-shaped seals 62' and 62'' are provided only on the ends of the applicator bar, wherein a flat surface 100 of the D-shaped seals 62' and 62'' have an adhesive that permits the respective D-shaped seals 62' and 62'' to be attached to plates PL. A portion of the D-shaped seals 62' and 62'' extend into the back bar 64'. Back bar 64' is similar to back bar 64 except the L-shaped extension (bracket 68) is not provided. The D-shaped seals 62' and 62'' extend into the bracket and contact ends of inner seal 54.

Preferably, a skirt 70' is secured to an outer surface of the guide blade 60 and held in place by the back bar 64'. The skirt 70' may be a rectangular metallic sheet, a polymeric material that may contain reinforcing fibers, such as a Kevlar® sheet with fiberglass fibers, or polymeric rubber material such as Neoprene.

Operation of the applicator bar 26'' is similar to that as applicator bar 26' except that as the rail wheels pass over the skirt 70', lubricant is squeezed onto the rail head between a passageway 74' defined by an end of

the skirt 70' and the rail head 20. Alternatively, the skirt 70' need not be flexible and the material flows through 74' due to pump activation. Also, in this arrangement the reservoir area 72' is defined by the area that is bounded by a portion of the rail head 20, an inner surface of the skirt 70', the D-shaped seals 62' and 62'', the front blade 56 and the inner seal 54. As can be seen with respect to the embodiments 26', 26'' and 26''', the skirts 70, 70' and the end 200 of the distribution blade 60 are positioned adjacent the exit end E and direct the material to the upper surface SU of the rail. Preferably, the skirts 70, 70' and the end 200 of the distribution blade 60 are positioned over portions of the rail upper surface SU.

Fig. 10 shows yet another embodiment of an applicator bar 26''', which is similar to applicator bar 26'', except for the below noted difference. Like reference numerals are used for like elements. The skirt 70' is not present in the applicator bar 26''', however, the distribution blade 60 is of substantial length so as to have an end portion with an end 200 in close proximity to the crown CR wherein the end portion, acts as a skirt, thereby eliminating the need for the separate skirts 70 and 70''.

Fig. 11 shows the reservoir R or dam 69 of the applicator bar 26. Fig. 12 shows the reservoir R' or dam 69' of the applicator bar 26''. Skirt 70 is shown in phantom on Fig. 11.

Figs. 13 and 14 show another embodiment of an applicator bar 26''', which is similar to applicator bar 26 except for the below noted differences. Like reference numerals are used for like elements. A D-shaped seal 62''' is provided similar to D-shaped seal 62, except a slot 300 is cut along a lower edge of the D-shaped seal 62 defining a passageway 350 so that ends of the front blade 56 and the distribution blade 60 are received within the D-shaped seal 62''' and the exit E is in fluid communication with the air

20057930450 262650

pocket A. D-shaped seal 62''' acts like a skirt. A plurality of holes 400 are defined on the D-shaped seal which are in fluid communication with the air pocket A. The holes are arranged to direct friction modifying material toward the rail upper surface SU and the rail crown CR. The inner seal 54 is replaced by a portion 500 of the D-shaped seal 62'''. The D-shaped seal 62''' is flexible and acts as a distributor having a D-shaped body. The plurality of holes 400 are in fluid communication with the exit end E and the air pocket A or reservoir chamber. Ends 700 and 800 of the D-shaped seal 62''' are clamped as previously described. Further, a silica gel material can be provided at the ends 700 and 800 to seal off the ends to prevent leakage of the friction modifying material. In operation friction modifying material flows from exit E into air pocket A and out of holes 400 toward the upper surface SU and the crown CR. A reservoir 600 may be defined between portion 500 and the rail upper surface SU.

With reference to all of the applicator bars 26, 26', 26'' 26''' and 26''', the position or the angle α (shown in Fig. 2) of entry through the exit of the passage E and the vertical axis Z passing through the rail web 22 can vary between, for example, 45°-70°. In other instances it is believed that the applicator bar exit E can be positioned away from the rail in any orientation, such as for example vertical, and an applicator attachment attached thereto which has a flow passageway to direct the friction modifying material to the rail upper surface SU and the crown CR. The vertical and horizontal position of the crown CR relative to the applicator bars 26, 26', 26'', 26''' and 26''', with the exception of the skirts 70 and 70', the seals and the distribution blade 60, may be varied to accommodate either passenger trains or freight trains, so that the train wheels do not come in contact with and damage the remaining structure of the applicator bars. Further, in some instances, the dam 69 or 69' may be removed and the friction modifying material is directed to

It is claimed:

1. An applicator bar for applying a material to a head of a rail, comprising:
 - a body;
 - a flow passageway defined in said body for the material to flow through, the flow passageway defining an exit end; and
 - a dam provided adjacent the exit end adapted to contain the material with the head of the rail.
2. An applicator bar as claimed in claim 1, wherein the dam is made of an elastomeric material.
3. An applicator bar as claimed in claim 2, wherein the dam comprises a D-shaped seal.
4. An applicator bar as claimed in claim 2, wherein said elastomeric material comprises Neoprene.
5. An applicator bar as claimed in claim 1, further comprising a skirt for enclosing an upper portion of said dam and defining a material exit with a portion of the rail to direct the material to a crown portion of the rail.
6. An applicator bar as claimed in claim 5, wherein said dam comprises a D-shaped seal and said skirt is flexible.
7. An applicator bar as claimed in claim 6, further comprising a supply reservoir of material in fluid communication with the flow passageway.
8. An applicator bar as claimed in claim 1, wherein said dam comprises an elongated elastomeric member and said applicator bar further includes means for forcing ends of said elastomeric member against a rail surface.

9. An applicator bar for applying a material to a head of a rail, comprising:

a body;

5 a flow passageway defined in said body for the material to flow through, the flow passageway defining an exit end and a skirt attached to said body positioned adjacent the exit end for directing the material to an upper surface of the rail.

10. An applicator bar as claimed in claim 9, wherein said skirt is made of a flexible material.

11. An applicator bar as claimed in claim 10, wherein said skirt is made of an elastomeric material.

12. An applicator bar as claimed in claim 9, wherein the exit is partially defined by an elongated distribution blade and said skirt is positioned adjacent said distribution blade.

13. An applicator bar as claimed in claim 9, wherein the exit is partially defined by an elongated distribution blade and said skirt is defined by a portion of said distribution blade.

14. A top of a rail applicator system, comprising:

a rail that includes a head having an upper surface with a crown; and

5 an applicator for applying a material to the upper surface of the rail, said applicator comprising a body,

10 a flow passageway defined in said body for the material to flow through the flow passageway defining an exit end for directing the material to said upper surface of said rail.

15. A top of rail applicator system as claimed in claim 14, further comprising a dam provided adjacent the exit end to contain the material with the head of the rail.

16. A top of the rail applicator system as claimed in claim 15, wherein said dam is made of elastomeric material.

17. A top of rail applicator system as claimed in claim 14, wherein said applicator comprises a skirt positioned adjacent the exit end for directing the material to the upper surface of the rail.

18. A top of rail applicator system as claimed in claim 17, wherein said skirt is flexible and positioned over a portion of the upper surface of the rail.

19. A top of rail applicator system as claimed in claim 15, further comprising a dam provided adjacent the exit end to contain the material with the head of the rail.

20. A top of rail applicator system as claimed in claim 19, further comprising a supply reservoir of material in fluid communication with the flow passageway.

21. A top of rail applicator system as claimed in claim 20, further comprising a pump in fluid communication with the supply reservoir and means for activating said pump to force the material through the flow passages and onto the upper surface of the rail.

22. An applicator bar as claimed in claim 13, wherein said distribution blade is made of a metal.

23. An applicator bar for applying a material to a head of a rail, comprising:

a body;

5 a flow passageway defined in said body for the material to flow through, the flow passageway defining an exit end for directing the material to an upper surface of the rail.

24. An applicator bar as claimed in claim 23, wherein said exit end is in fluid communication with a flexible distributor having a body having at least one distribution hole in fluid communication with the exit end
5 for distributing friction modifying material toward an upper surface of the rail.



25. An applicator bar as claimed in claim 24, wherein said flexible distributor body includes a reservoir chamber in fluid communication with said exit end and said distribution holes.

26. An applicator bar as claimed in claim 24, wherein said body has a passageway for receipt of said exit end.

27. An applicator bar as claimed in claim 9, wherein said skirt comprises metal.

28. An applicator bar as claimed in claim 10, wherein said skirt comprises a polymeric material containing reinforcing fibers.

1/6

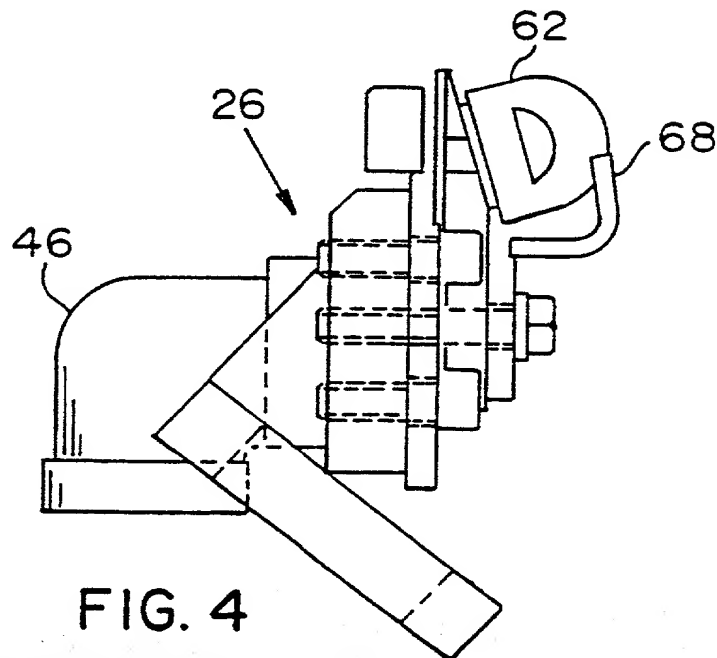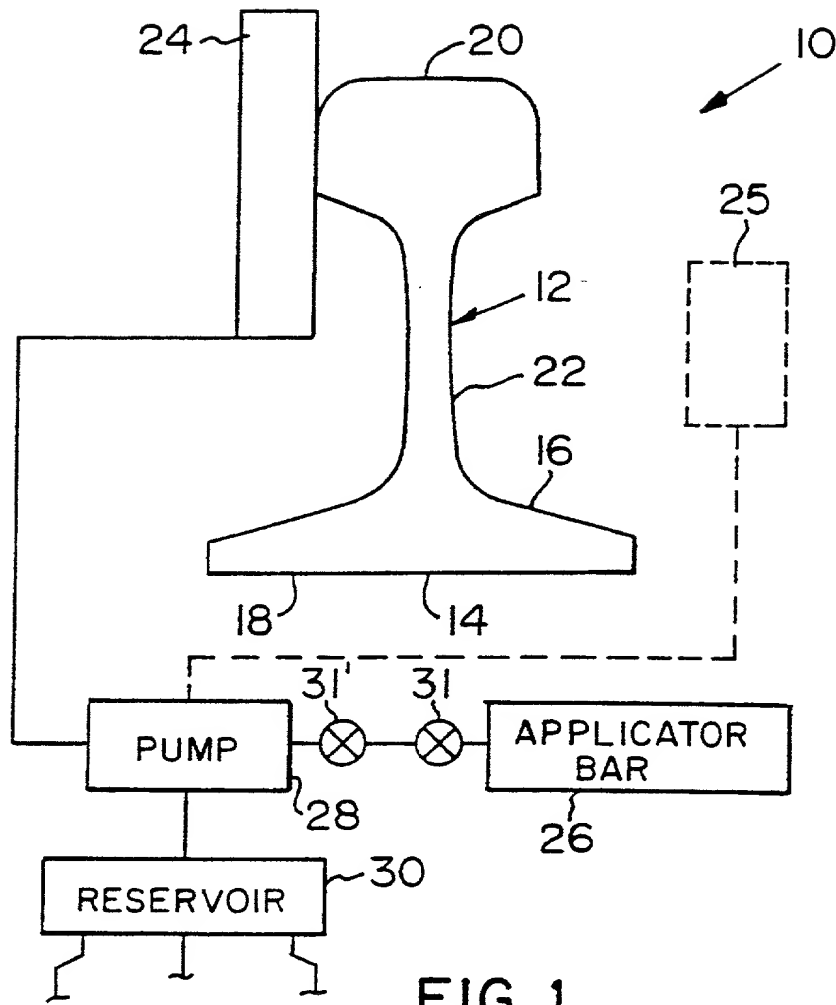

SUBSTITUTE SHEET (RULE 26)



FIG. 2



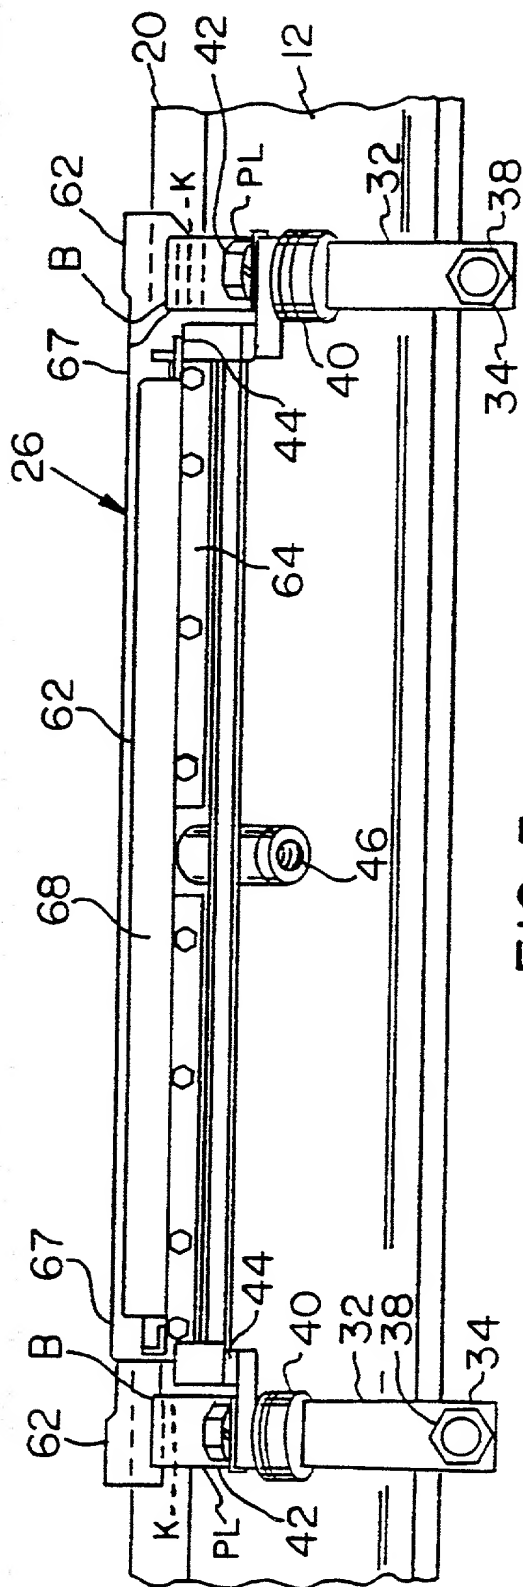


FIG. 3

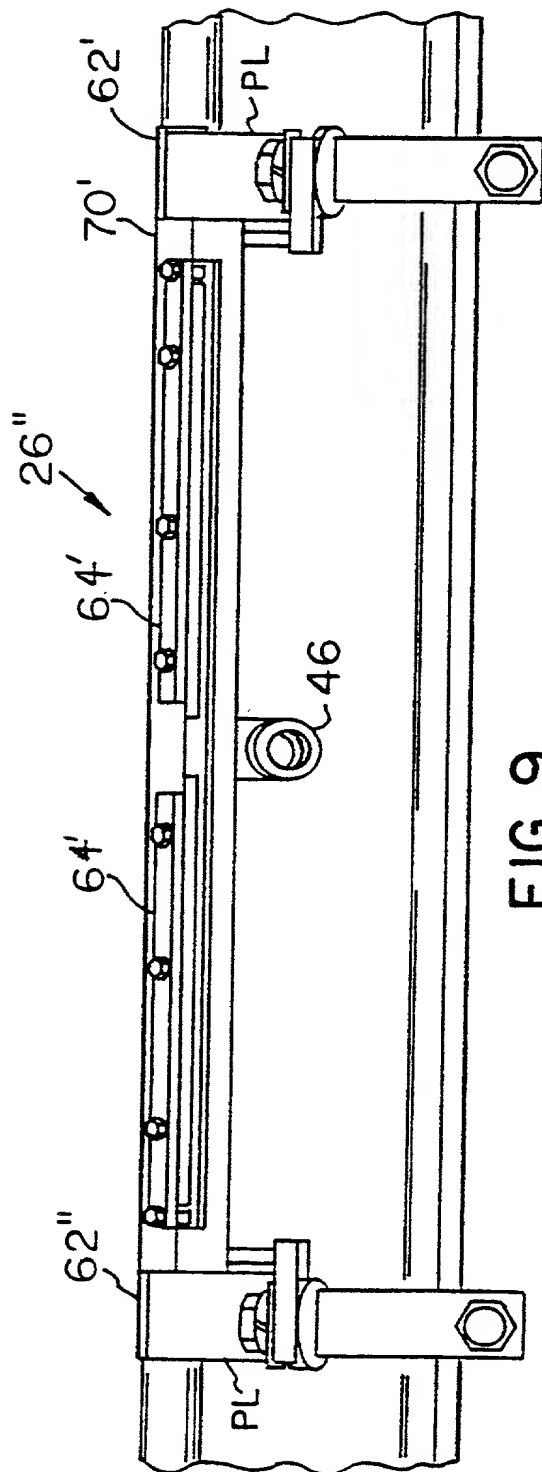


FIG. 9

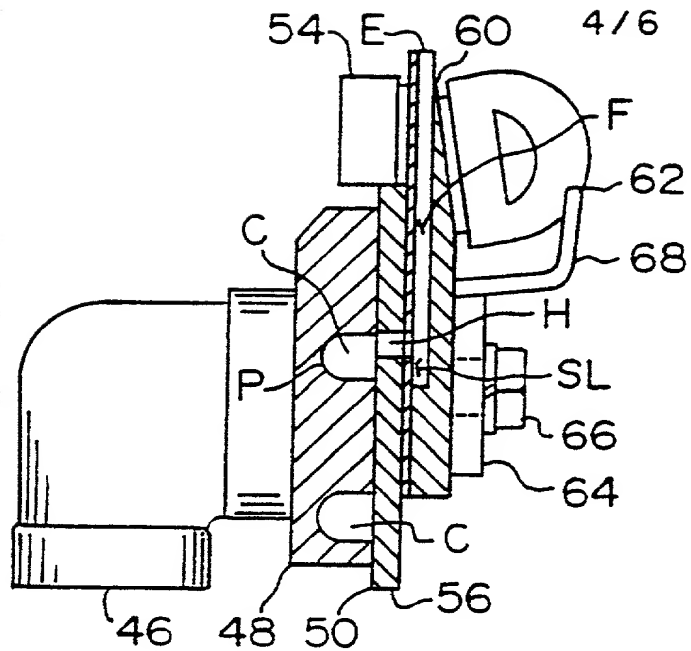


FIG. 5

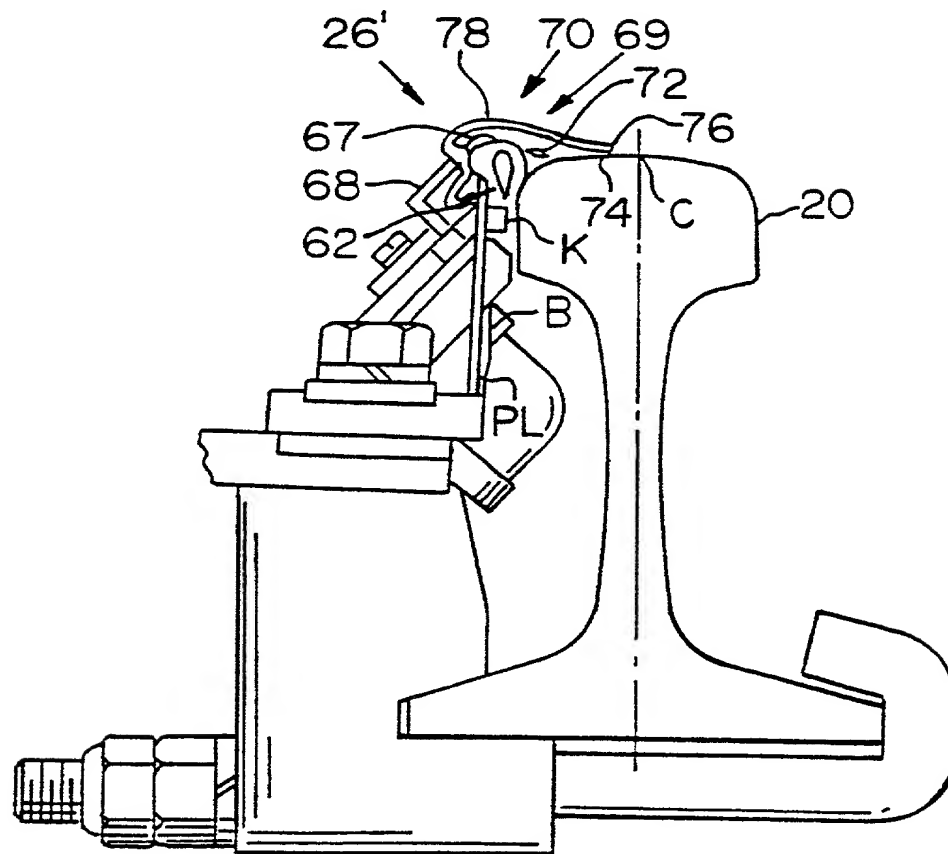


FIG. 7

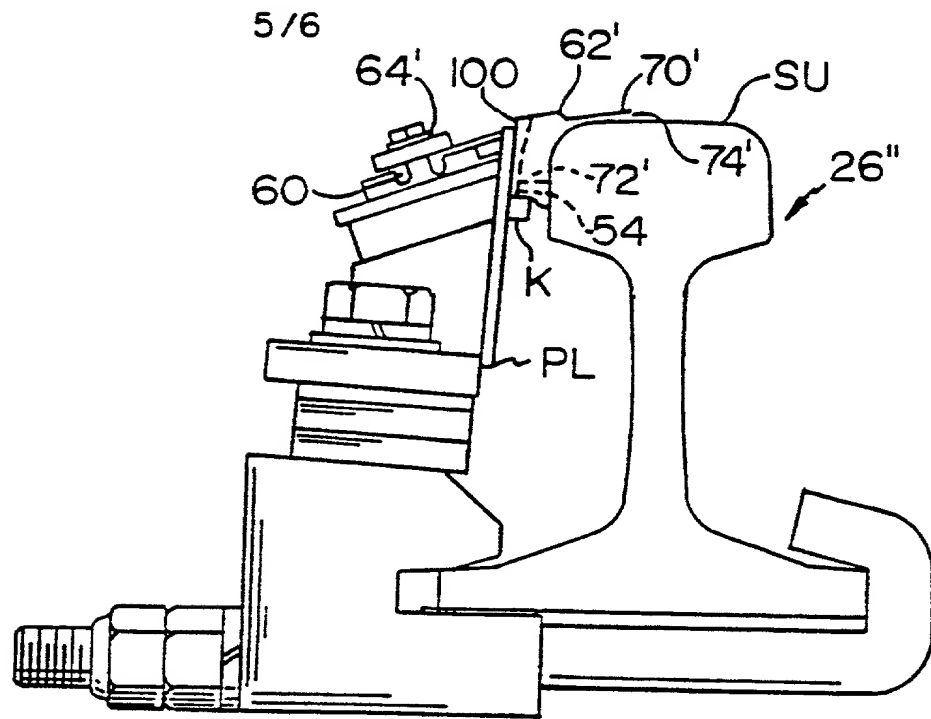


FIG. 8

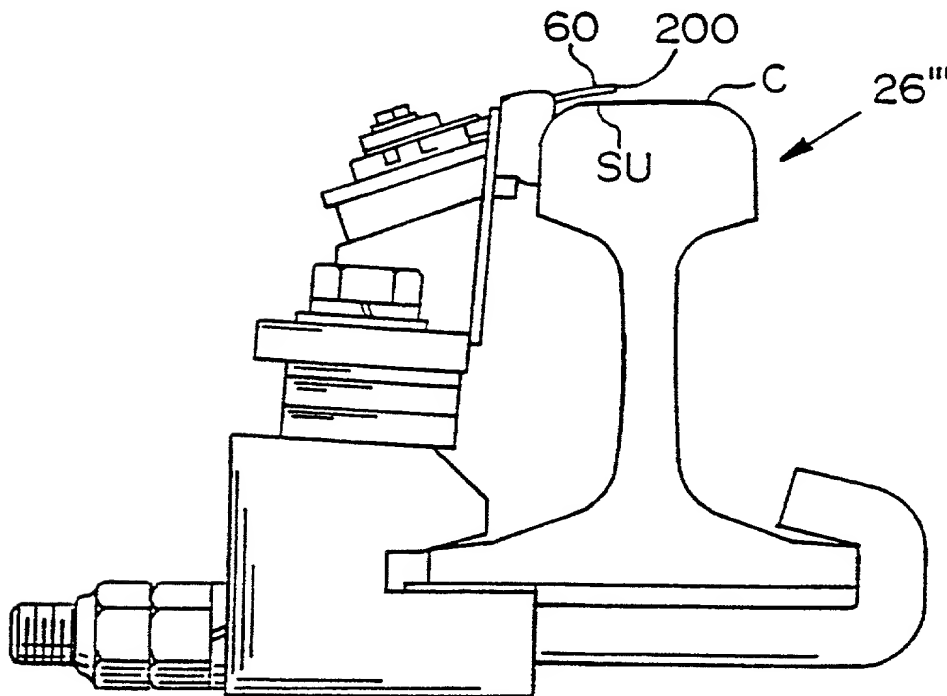


FIG. 10

6 / 6

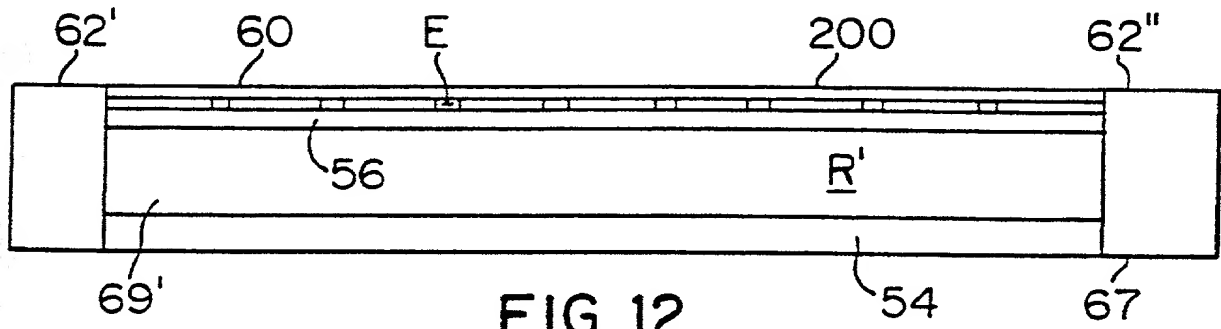


FIG. 12

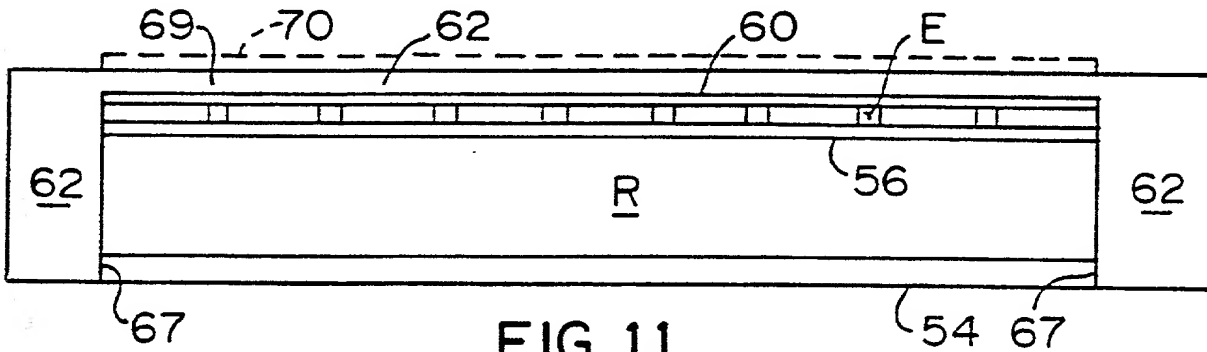


FIG. 11

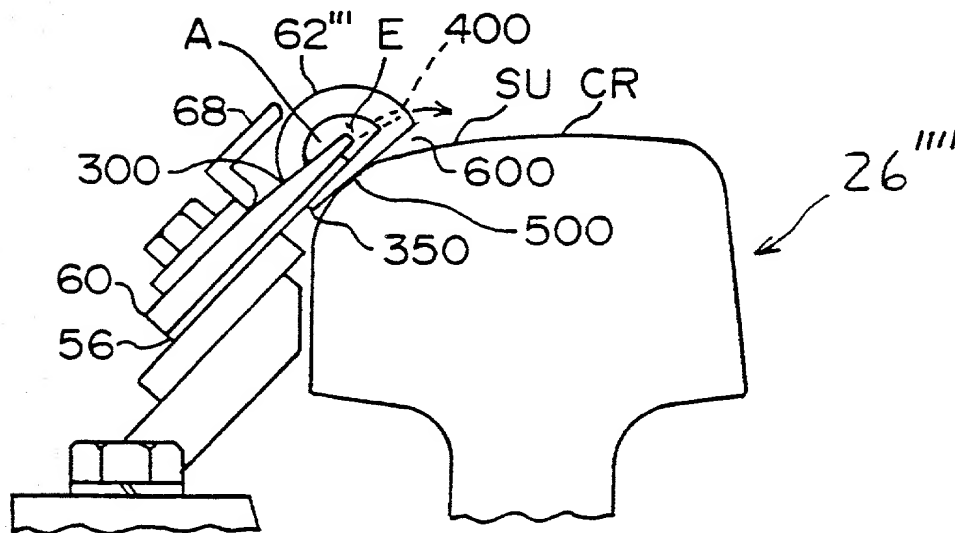


FIG. 13

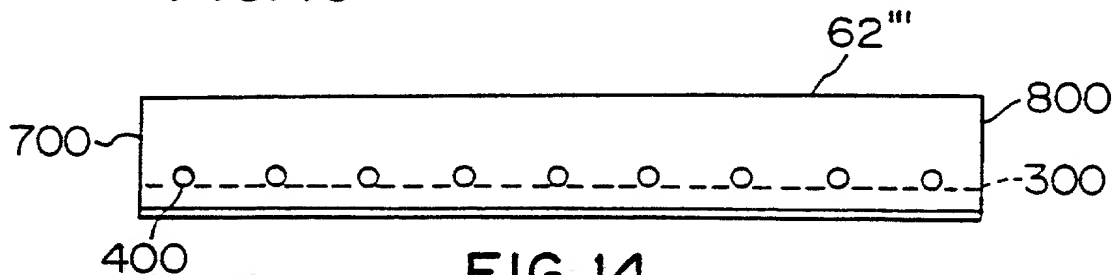


FIG. 14

DECLARATION AND POWER OF ATTORNEY

1-00 W. Thomas Urmson, Jr., John W. Mospan and Frank T. Lenco declare: 2-00 3-00

We are citizens of the United States of America, and residents of 1375 Pittsburgh Road, Valencia, Pennsylvania 16059; 925 Stevendale Drive, Pittsburgh, Pennsylvania 15221; and 96 North Bryant Avenue, Pittsburgh, Pennsylvania 15202, respectively.

We believe ourselves to be the original, first and joint inventors of the improvement entitled TOP OF RAIL APPLICATOR which is described and claimed in International Application No. PCT/US00/09269, filed 07 April 2000, of which this application, United States Patent Application Serial No. 09/937,792, received 28 September 2001, is the national phase.

We have reviewed and understand the contents of the specification, including the claims.

That this application claims the benefit of earlier filed United States Provisional Patent Application Serial No. 60/128,290, filed 8 April 1999.

That, as to the subject matter of this application which is common to said provisional patent application, we do not know and do not believe that the same was ever known or used in the United States before our invention thereof; or patented or described in any printed publication in any country before our invention thereof or more than one year prior to said provisional patent application; or in public use or on sale in the United States more than one year prior to said provisional patent application.

That said common subject matter has not been patented or been made the subject of an inventor's certificate before the date of said provisional patent application in any country foreign to the United States on an application filed by us or our legal representatives or assigns more than twelve months prior to said provisional patent application.

That the first filed application for patent or inventor's certificate on said invention set forth in said provisional patent application filed by us or our legal representatives or assigns in any country foreign to the United States is: none.

As to the subject matter of this application which is not common to said provisional patent application, we do not know and do not believe that the same was ever known or used in the United States before our invention thereof; or patented or described in any printed publication in any country before our invention or more than one year prior to the date of this application; or in public use or on sale in the United States more than one year prior to the date of this application.

That said subject matter of this application which is not common to said provisional patent application has not been patented or made the subject of an inventor's certificate in any country foreign to the United States on an application filed by us or our legal representatives or assigns more than twelve months prior to the date of this application.

That the first filed application for patent or inventor's certificate on said invention set forth in this application filed by us or our legal representatives or assigns in any country foreign to the United States is: none.

We acknowledge our duty to disclose information of which we are aware which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a), including matters as occurred between the filing date of our said provisional patent application and the filing date of this application.

We declare further that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

We hereby appoint Paul M. Reznick, Registration No. 33,059; William H. Logsdon, Registration No. 22,132; Russell D. Orkin, Registration No. 25,363; David C. Hanson, Registration No. 23,024; Frederick B. Ziesenheim, Registration No. 19,438; Richard L. Byrne, Registration No. 28,498; Kent E. Baldauf, Registration No. 25,826; Barbara E. Johnson, Registration No. 31,198; John W. McIlvaine, Registration No. 34,219; Blynn L. Shideler, Registration No. 35,034; Julie W. Meder, Registration No. 36,216; Lester N. Fortney, Registration No. 38,141; Randall A. Notzen, Registration No. 36,882; James G. Porcelli, Registration No. 33,757; Kent E. Baldauf, Jr., Registration No. 36,082; Dean E. Geibel, Registration No. 42,570; Christian E. Schuster, Registration No. 43,908; Thomas J. Clinton, Registration No. 40,561; Nathan J. Prepelka, Registration No. 43,016; Jessica M. Schroth, Registration No. 47,102; Kirk M. Miles, Registration No. 37,891; and J. Matthew Pritchard, Registration No. 46,228, whose post office address is 700 Koppers Building, 436 Seventh Avenue, Pittsburgh, Pennsylvania 15219-1818, Telephone No. 412-471-8815, our attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, to amend the specification, to appeal in case of rejection, as they may deem advisable, to receive the patent when granted and generally to do all matters and things needful in the premises, as fully and to all intents and purposes as we could do.

All correspondence and telephone calls should be addressed to Paul M.

Reznick.

We hereby subscribe our names to the foregoing specification and claims,
declaration and power of attorney.

Date 12/6/01

Inventor W. Thomas Urmson, Jr.
W. Thomas Urmson, Jr.

Date 12/6/01

Inventor John W. Mospan
John W. Mospan

Date 12/6/01

Inventor Frank T. Lenco
Frank T. Lenco